


## In-Situ Thermal Destruction (ISTD)

<p><b>Name of Process:</b> In-Situ Thermal Destruction (ISTD)</p>	<p><b>Status:</b> Since 1997, ISTD has treated a wide range of chlorinated organic compounds, including polychlorinated biphenyls (PCBs); chlorinated solvents (e.g., trichloroethene [TCE], tetrachloroethene [PCE]); mono- di- and trichlorobenzenes; and polychlorinated dibenzodioxins and furans (PCDD/Fs).</p>
<p><b>Vendor:</b> TerraTherm, Inc Web site: <a href="http://www.terratherm.com">http://www.terratherm.com</a></p>	<p>USEPA has granted TerraTherm's ISTD a draft Nationwide Toxic Substances Control Act (TSCA) Permit.</p> <p>A famous project where ISTD has been applied is the Rocky Mountain Arsenal (RMA) Commerce City, CO, USA. This is one of the U.S. Department of Defense's most complex CERCLA sites with its so-called Hex Pit. The Hex Pit Unit contains buried pesticide wastes derived from post-World War II conversion of chemical weapons facilities to commercial pesticide manufacturing. The Hex Pit was the only in-situ destruction of hazardous material attempted at RMA and it was conducted under the scrutiny of the USEPA's Superfund Innovative Technology Evaluation (SITE) program.</p>
<p><b>Applicable Pesticides and related POPs wastes:</b> ISTD is applicable to <u>all</u> organic pesticides.</p>	<p><b>Technology description:</b> In-Situ Thermal Destruction (ISTD) is a soil remediation process in which heat and vacuum are applied simultaneously to subsurface soils, either with an array of vertical heater/vacuum wells, or, less commonly, with surface heater blankets. No excavation is necessary. Thermal conduction accounts for the majority of heat flow from the high temperature (~800° C) heaters. As soil is heated, volatile and semi-volatile contaminants in the soil are vaporized and treated by a number of mechanisms, including: (1) evaporation into the subsurface air stream induced by application of vacuum, (2) steam distillation into the water vapor stream, (3) boiling, (4) oxidation, and (5) pyrolysis. The vaporized water, contaminants, and natural organic compounds are drawn by the vacuum in a counter-current direction to the heat flow into the vacuum source at the thermal wells or blankets.</p> <p>Compared to fluid injection processes, conductive heat injection is very uniform in its vertical and horizontal movement. Furthermore, transport of the vaporized contaminants is enhanced by the creation of permeability that results from drying and shrinking of the soil. Flow paths are created even in tight silt and clay layers, which allow escape and capture of the vaporized contaminants. The combined effectiveness of both heat and vapor flow yields nearly 100% sweep efficiency. In addition, very high displacement efficiency (approaching 100%) can be reached in the heated soil. This occurs because the soil can, if needed, be heated to high temperatures (&gt;500°C) for prolonged times (many days).</p> <p>Field project experience has confirmed that a combination of high temperature and long times result in extremely high overall removal of even the high boiling point contaminants from the soil. Data indicate that 95 to 99% or more of the contaminant mass is destroyed in situ, as the vaporized contaminants pass through superheated soil close to the heater-vacuum wells. In practice, produced vapors are treated with an air pollution control (APC) system to remove any vaporized contaminants that have not been destroyed <i>in situ</i>.</p>

## In-Situ Thermal Destruction (ISTD)

### Process diagram:

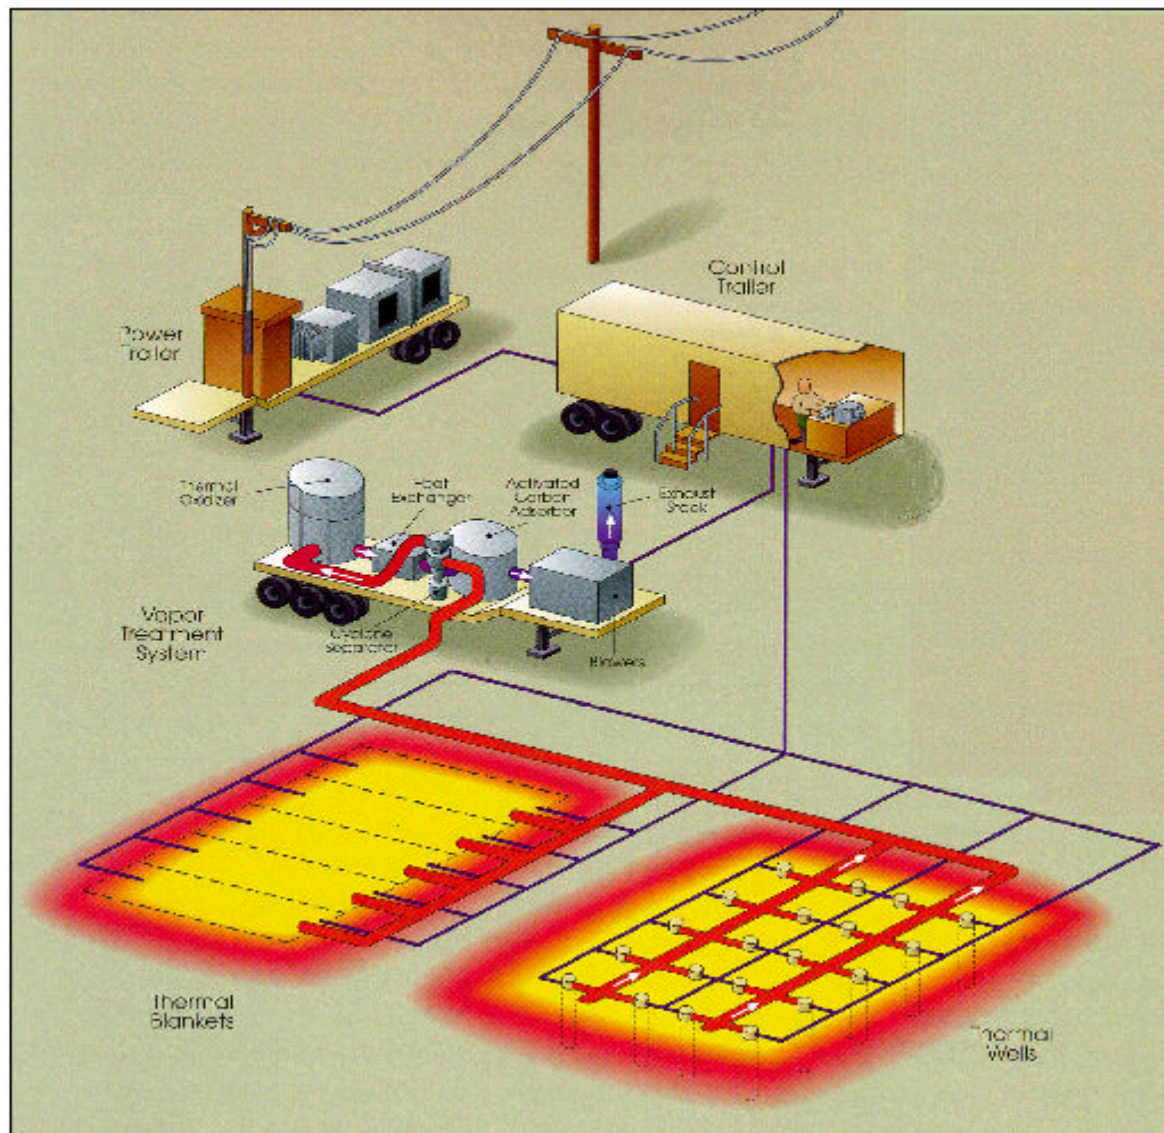

--> Electrical distribution trailer with utility pole power drop is at top left, and Control trailer with continuous emission monitoring system (CEMS) is at top right.

--> Air Quality Control Trailer (at center) includes unit processes for treatment of Semi-Volatile Organic Compounds, such as pesticides, PCBs and dioxins. These include particle separator, thermal oxidizer, air-to-air heat exchanger, carbon and acid-gas scrubber canisters, redundant discharge blowers, stack, and control cabinets.

--> Air Quality Control for treatment of Volatile Organic Compounds such as chlorinated solvents generally consists of fewer unit processes (e.g., carbon adsorption only).

### Performance:

#### **Treatment efficiency:**

At the Missouri Electric Works (MEW) Superfund Site, Cape Girardeau, Missouri USA, ISTD treatment to soil temperatures of  $> 480^{\circ}\text{C}$  over a period of 42 days was demonstrated to achieve the following results: pre-treatment PCB concentrations averaged 782 mg/kg (n=92), with maximum concentration of 20,000 mg/kg; and post-treatment PCB concentrations averaged  $< 0.033$  mg/kg (n=83) [4]. The combination of ISTD and an off-gas treatment system consisting of flameless thermal oxidizer, heat exchanger, and adsorption on granular activated carbon demonstrated achievement of  $> 99.999999\%$  Destruction and Removal Efficiency (DRE) and served as the basis for the granting by USEPA of a draft Nationwide Toxic Substances Control Act (TSCA) Permit. Similar treatment results at other sites have demonstrated that ISTD typically reduces even high concentrations of organic contaminants in soil to non-detect concentrations.

## ***In-Situ Thermal Destruction (ISTD)***

At a Demonstration project for the California EPA, at the Former Mare Island U.S. Naval Shipyard, from September through December 1997, PCB-contaminated soils were treated with ISTD, and a DRE for PCB (Aroclor 1260) in excess of 99.9999% was reached. All post-treatment samples had no-detectable PCB concentrations at a quantitation limit of 10ug/kg) [11], [15].

At the Tanapag Village Site, Saipan, NMI, 1000 cubic yards of PCB-impacted soil were treated using an ex-situ version of ISTD to 10 ppm or less. Concentrations had been represented to average 200 ppm, but in fact concentrations averaged 500 ppm, (Arochlor 1254 and 1260) and individual batches were 10 000 ppm.) [12], [15].

From September through December 1998, ISTD was utilized to treat a PCB Spill Area at the U.S. Naval Facility Centerville Beach (NFCB), Ferndale, CA containing around 1000 cubic yards of PCB-contaminated soils under/adjacent to a former transformer /diesel generator building. Target treatment area achieved the remedial objectives for all samples (Average PCB concentration of 1 ppm or lower; Dioxins and Furans: Total 2,3,7,8 –TCDD TEQ <1.0 ppb) [13], [15].

Rocky Mountain Arsenal (RMA) Commerce City, CO, USA is one of the U.S. Department of Defense's most complex CERCLA sites. The Hex Pit unit contains buried pesticide wastes derived from post-World War II conversion of chemical weapons facilities to commercial pesticide manufacturing. The vast majority of the RMA site is being remediated by relocating contaminated material to an on-site landfill and capping the lower level contamination in place. The Hex Pit was the only in-situ destruction of hazardous material attempted at RMA and it was conducted under the scrutiny of the USEPA's Superfund Innovative Technology Evaluation (SITE) program [16].

The RMA ISTD pesticide project mentioned above was curtailed due to acid corrosion of stainless steel piping after 12 days of heating. The vendor believes this material failure was a result of hydrochloric acid corrosion due to organochlorine pesticide tars being forced into the annuli of our heater-vacuum wells prior to heating as a result of horizontal well drilling activities carried out by others beneath the Hex Pit. Such drilling occurred beneath the bottom of the Hex Pit following installation of the ISTD well field, but prior to ISTD heating. The evidence of this deleterious impact was: (1) the appearance of frac-outs of drilling fluid that emerged under the ISTD well field surface cover during horizontal drilling, and (2) the subsequent finding (after ISTD heating and shut-down) that nearly all of the most severely-corroded heater-vacuum wells were located directly above the horizontal well that produced the most frac-out events. It is recommended that future applications of ISTD in pesticide waste pits would need to begin with an ISTD pilot test to confirm the compatibility of the piping metallurgy with the pesticide waste materials.

### **ISTD Performance relative to Dioxins [14]**

The vendor has been performing very much work in studying this issue and due to this reason has been included quite extensively in this Fact Sheet [14]:

ISTD is fundamentally different than conventional ex-site treatment technologies like low- and high temperature thermal desorption and incineration.

ISTD does not employ flame-based thermal combustion to remove and destroy contaminants in-situ or in the treatment of the off-gas and therefore does not create the conditions typically required for the creation of dioxins and furans as enumerated below.

### **EVIDENCE THAT ISTD DOES NOT CREATE, OR RELEASE DIOXINS AND FURANS BELOW GROUND**

Field-scale ISTD projects have demonstrated that dioxins or furans remaining after thermally treating PCB-contaminated soils were less than the average concentration in uncontaminated soils in North America (1, 6) (i.e., post-ISTD treatment soil samples were below "background" concentrations for North American soils). There has been no evidence from these projects that dioxins or furans were formed in or around the soil of the thermal treatment zone during ISTD. Table 1 summarizes the results of soil sampling and analyses for both PCBs and dioxins before and after ISTD at the Missouri Electric Works (MEW) Superfund Site, Cape Girardeau, MO (7) and at the U.S. Naval Facility Centerville Beach (NFCB), Ferndale, CA (8). The post-treatment soil concentrations are clearly much lower than the pre-treatment concentrations. The previously cited data for a treatability study of PAH- and dioxin-contaminated soil from the Southern California Edison (SCE) Former Pole Yard, Alhambra, CA (4) is included in Table 1 for comparison.



## In-Situ Thermal Destruction (ISTD)

Table 1. Pre- and post-treatment PCB and dioxin soil concentrations measured during ISTD projects.

LOCATION	MEAN AIR FLOW RATE (SCMM <sup>1</sup> )	MEAN OXIDIZER BED TEMPERATURE (°C)	MEAN EMISSION RATE (g TEQ/hr)	MEAN STACK GAS CONCENTRATION <sup>2</sup> (ng TEQ/dscm)
S. Glens Falls, NY Thermal Blanket Demo (PCBs) <sup>3</sup>	42.5	960	1.2 x 10 <sup>-10</sup>	0.004
Cape Girardeau, MO Thermal Well Demo (PCBs) <sup>4</sup>	2.1	1027	3.47 x 10 <sup>-10</sup>	0.00291
Cape Girardeau, MO Thermal Blanket Demo (PCBs) <sup>5</sup>	2.6	1027	4.51 x 10 <sup>-11</sup>	0.000289
Centerville Beach, CA Thermal Well Demo (PCBs) <sup>6</sup>	4.9	927	1.84 x 10 <sup>-09</sup>	0.00547

<sup>1</sup> SCMM = standard cubic meters per minute.

<sup>2</sup> ng TEQ/dscm = nanograms 2,3,7,8-Tetrachlorodibenzodioxin Toxic Equivalency per dry standard cubic meter.

<sup>3</sup> Reference (9), Tables 3A and 9. Stack sampling was performed isokinetically by Air Pollution Characterization and Control Ltd., Tolland, CT with PCDD/PCDF analyses (EPA Method 23) by Triangle Laboratories, Durham, NC.

<sup>4</sup> Reference (7) Stack sampling was performed isokinetically by ENSR Corporation, Houston, TX with PCDD/PCDF analyses (EPA Method 23) by Triangle Laboratories, Durham, NC.

<sup>5</sup> Reference (10) Stack sampling was performed isokinetically by ENSR Corporation, Houston, TX with PCDD/PCDF analyses (EPA Method 23) by Triangle Laboratories, Durham, NC.

<sup>6</sup> Reference (8) Stack sampling was performed isokinetically by Arcadis Geraghty & Miller, Mountain View, CA with PCDD/PCDF analyses (EPA Method 23) by Alta Analytical Laboratories, El Dorado Hills, CA.

### EVIDENCE THAT ISTD DOES NOT CREATE, OR RELEASE DIOXINS AND FURANS ABOVEGROUND

ISTD systems are designed to prevent emission of dioxins or furans or their formation in aboveground treatment units. The protective design elements include: (a) insertion heaters to preheat the vapor collection manifolds, thereby preventing condensation of off-gases during conveyance from the well field to the treatment unit; (b) a flameless thermal oxidizer (FTO) operated at 1700F, that provides a large reaction chamber at very uniform high temperature (in contrast to a locally very hot flame/burner in an incinerator and to the lower temperatures of catalytic oxidizers), and a resulting oxidation zone with sufficient supply of free radicals thereby ensuring a high destruction and removal efficiency for organic contaminants including PCDD/Fs and PCDD/F precursors (e.g., 99.99% DRE within the FTO) and the prevention of the formation of PICs; (c) an air-to-air heat exchanger to reduce the temperature of the off-gases at the oxidizer outlet within a fraction of a second to ~250F, well below the dioxin formation range; and, (d) polishing of off-gas with granular activated carbon (GAC) adsorbers prior to the discharge stack. The combined destruction and removal efficiency of the in-situ processes and the off-gas treatment achieved using ISTD for the treatment of PCB sites has been demonstrated to be >99.999999% (Table 2).

Table 2. Dioxin stack emissions measured during ISTD projects. Air quality control systems consisted of a flameless thermal oxidizer, heat exchanger, and granular activated carbon.

LOCATION	MEAN PRE-TREATMENT PCB SOIL CONCENTRATION (µg PCB/kg)	MEAN POST-TREATMENT PCB SOIL CONCENTRATION (µg PCB/kg)	MEAN PRE-TREATMENT DIOXIN SOIL CONCENTRATION (µg TEQ/kg)	MEAN POST-TREATMENT DIOXIN SOIL CONCENTRATION <sup>1</sup> (µg TEQ/kg)
Cape Girardeau, MO <sup>2</sup> Thermal Well Demo (PCBs)	649,000 (n = 111)	22 <sup>3</sup> (n = 101)	6.5 <sup>4</sup>	0.0032 (n = 4)
Centerville Beach, CA Thermal Well Demo (PCBs) <sup>5</sup>	302,000 (n = 6)	85 <sup>6</sup> (n = 16)	1.7 (n = 2)	0.011 (n = 10)
Alhambra, CA Treatability Study (PAHs) <sup>7</sup>	N/A	N/A	1.23 (n = 1)	0.061 (n = 6)

<sup>1</sup> For comparison, background level in uncontaminated North American soils = 0.0079 µg TEQ/kg, per Reference (6)

<sup>2</sup> Reference (7) Soil sampling was performed by Philip Environmental, Columbia, IL with PCDD/F analyses (EPA Method 8280) by Triangle Laboratories, Durham, NC.

<sup>3</sup> Of 101 samples analyzed, 94 samples were below the detection limit of 33 µg PCB/kg. Mean was calculated by taking 1/3 of the detection limit for each sample below detection limit.

<sup>4</sup> Estimated value, based on an assumption that dioxins and furans are typically present in PCB Aroclor mixtures at a concentration of 1 part in 100,000.

<sup>5</sup> Reference (8) Soil sampling was performed by Radian and TTEM, Rancho Cordova, CA with PCDD/F analyses (EPA Method 8280A) by Triangle Laboratories, Durham, NC.

<sup>6</sup> Of 16 samples analyzed, all were below the detection limit of 170 µg PCB/kg. Mean was calculated by taking 1/3 of the detection limit.

<sup>7</sup> Reference (4) Pretreatment concentration elevated due in part to use of low resolution version of EPA Method 8280, which has higher detection limits.

# In-Situ Thermal Destruction (ISTD)

## SUMMARY

In summary, there is no evidence to support the contention that ISTD results in the formation or release of dioxins or furans, either in the treated soils or in the off-gas. Quite to the contrary, the evidence indicates that ISTD applied to sites with high levels of chlorinated hydrocarbon contamination exceeded the soil cleanup objectives and reduced levels of PCDD/Fs in treated soils to near background levels, while achieving air emissions of PCDD/Fs well below mandated MACT standards.

## Throughput:

ISTD, being an in-situ process, can be applied at a wide range of scales. Soil and waste volumes of 500 to 10,000 m<sup>3</sup> or more can be remediated in a single, 2- to 3-month batch treatment. Larger sites can be treated in a series of batches, utilizing the same equipment from batch to batch.

## Wastes/Residuals:

Unlike standard ex-situ thermal desorption processes, ISTD produces negligible quantities of waste products. No liquid waste streams are generated, and the off-gas treatment has been demonstrated to achieve over 99.999999% Destruction and Removal Efficiency (DRE).

## Reliability:

ISTD has been implemented at many sites without any U.S. Occupational Safety and Health Administration (OSHA) recordables or lost-time accidents to date. The reliability of ISTD at the field scale for pesticide remediation has not yet been confirmed.

## Limitations:

Treatment of organo-pesticides using ISTD requires attainment of soil/waste temperatures above the boiling point of water; thus, excessive recharge of groundwater into the treatment zone may prevent water from being boiled off cost-effectively and retard achievement of target temperatures. Control of groundwater recharge into the thermal treatment zone, using groundwater pumping or hydraulic barriers such as steel sheeting, slurry walls, freeze walls, etc. may therefore be necessary in such cases. Heating of highly concentrated, heavily chlorinated pesticide liquids can result in hydrolysis with resulting production of highly corrosive hydrochloric acid (HCl). However, use of appropriate neutralization materials in the sand pack around the heater-vacuum wells, and/or more corrosion-resistant metallurgy may be able to minimize these effects and protect against HCl corrosion.

## Transportability:

ISTD can be implemented in virtually any location with access to adequate grid-based or portable power supplies. The power required depends largely on how much water is present in the soil, the target treatment temperature and the rate at which groundwater seeps into the treatment zone.

## Conclusion:

The status of the ISTD process for treatment of pesticides is that several successful bench-scale treatability studies have been completed, but that the process has not yet been demonstrated on pesticides at the field scale. However, five successful field-scale applications of ISTD for PCBs, plus others for chlorinated solvents and petroleum hydrocarbons, along with the similarities between pesticides and those compounds indicates that the technology is well-suited for remediation of pesticides. The maturity of the ISTD process can be concluded also at the fact that at present TerraTherm is under contract at three major sites in The United States and is in the process of securing two other projects.

## Detailed information:

See Data in Annexes

## Full Scale treatment examples:

At present TerraTherm is under contract at three major sites in The United States and is in the process of securing two other projects. Also, TerraTherm holds world-wide rights to license and implement ISTD.

- ISTD Remediation of polycyclic aromatic hydrocarbons (PAHs), pentachlorophenol (PCP), and Dioxins, 10,500 m<sup>3</sup> of silty-sand soil up to 30 m below ground surface (BGS), extremely low (detection limit) clean-up goals, May 2002 – December 2003.
- Confidential Client, Ohio - Active manufacturing facility, ISTD Remediation of chlorinated volatile organic compounds (CVOCs), 7,700 m<sup>3</sup> of low permeability clay, clean-up goal: 1 mg/kg TCE, July 2002 – June 2003
- Confidential Client, California - Former manufacturing facility, thermal enhancement of existing multiphase extraction (MPE), 11,400 m<sup>3</sup> of silty-clay soil, above and below water table, clean-up goal: 1 mg/kg dichloroethene (DCE), September 2002 – August 2003

# In-Situ Thermal Destruction (ISTD)

## Vendor Contact details:

Ralph S. Baker, Ph.D.,  
CEO and Technology Manager,  
TerraTherm, Inc.,  
356 Broad Street, Fitchburg, MA 01420 USA  
Phone: (978) 343-0300  
FAX: (978) 343-2727  
Email: [rbaker@terraetherm.com](mailto:rbaker@terraetherm.com)

*\*Note: This NATO/CCMS fellowship report does not certify any particular technology, but tries to summarise the state of the art of the concerned technology on the basis of data delivered by the company or other source, which have been made available to the author and refers the reader to original documents for further evaluation. Without the efforts of the Technology supplier it would not have been possible to set up this fact sheet.*

*\*\* Note: The text for this report is verified by the Technology supplier on 11. December 2002*

## Patent Notice:

Covered by one or more of the following U.S. patents: 4,984,594, 5,076,727, 5,114,497, 5,169,263, 5,190,405, 5,193,934, 5,209,604, 5,221,827, 5,229,583, 5,233,164, 5,244,310, 5,271,693, 5,318,116, 5,553,189, 5,656,239, 5,660,500, 5,674,424, 5,997,214, 6,102,622 and 6,419,423. Additional Patents Pending both within the U.S. and internationally. All rights reserved by the University of Texas at Austin, Shell Oil Co., and TerraTherm, Inc.

## References:

1. Iben, I.E.T., W.A. Edelstein, R.B. Sheldon, A.P. Shapiro, E.E. Uzgiris, C.R. Scatena, S.R. Blaha, W.B. Silverstein, G.R. Brown, G.L. Stegemeier, and H.J. Vinegar. 1966. "Thermal Blanket for In-Situ Remediation of Surficial Contamination: A Pilot Test," *Environmental Science and Technology*, 30(11): 3144-3154.
2. Sheldon, R.B., I.E.T. Iben, W.A. Edelstein, H.J. Vinegar, E.P. deRouffignac, F.G. Carl, J.L. Menotti, J. Coles, J.M. Hirsch, W.B. Silverstein, S.R. Blaha, C.R. Scatena, and G.W. Siegel. 1996. "Field Demonstration of a Full-Scale In-Situ Thermal Desorption System for the Remediation of Soil Containing PCBs and Other Hydrocarbons," *Proceedings of the HAZWaste World-Superfund XVII Conference*, Washington, D.C., Oct. 15-17, 1996.
3. Vinegar, H.J., E.P. de Rouffignac, R.L. Rosen, G.L. Stegemeier, M.M. Bonn, D.M. Conley, S.H. Phillips, J.M. Hirsch, F.G. Carl, J.R. Steed, D.H. Arrington, P.T. Brunette, W.M. Mueller, and T.E. Siedhoff. 1997. "In Situ Thermal Desorption (ISTD) of PCBs", *Proceedings of the HazWaste/World Superfund XVIII Conference*, Washington, DC, December 2, 1997.
4. Naval Facilities Engineering Service Center. 1998. "A Demonstration of In-Situ Thermal Desorption: Destruction of PCB's in Contaminated Soils at Mare Island Shipyard." *TechData Sheet, TDS-2051-ENV, NFESC*, Port Hueneme, CA, March, 1998.
5. Conley, D.M., and C.M. Lonie. 2000. "Field Scale Implementation of In Situ Thermal Desorption Thermal Well Technology." pp. 175-182. In: G.D. Wickramanayake and A.R. Gavaskar (eds.) *Physical and Thermal Technologies: Remediation of Chlorinated and Recalcitrant Compounds*. Battelle Press, Columbus, OH.
6. Vinegar, H.J., G.L. Stegemeier, F.G. Carl, J.D. Stevenson, and R.J. Dudley. 1999. "In Situ Thermal Desorption of Soils Impacted with Chlorinated Solvents." *Proceedings of the Annual Meetings of the Air and Waste Management Association*, Paper No. 99-450.
7. Baker, R.S., J.P. Galligan, D. Gregory, D.M. Conley, S. Hall, and P. Patton. 2000. "In Situ Thermal Desorption Treatability Study at Rocky Mountain Arsenal Hex Pit." Presented at the 2nd International Conference on Remediation of Chlorinated and Recalcitrant Compounds, Monterey, CA, May 22-25, 2000.
8. Stegemeier, G.L., and Vinegar, H.J. 2001. "Thermal Conduction Heating for In-Situ Thermal Desorption of Soils." Ch. 4.6-1 in: Chang H. Oh (ed.), *Hazardous and Radioactive Waste Treatment Technologies Handbook*, CRC Press, Boca Raton, FL
9. Baker, R.S., Bukowski, R.J. and McLaughlin, H. 2002. "Pilot-Scale Demonstration of In-Pile Thermal Destruction of Chlorobenzene-Contaminated Soil." In: G.D. Wickramanayake and A.R. Gavaskar (eds.) *Physical and Thermal Technologies: Remediation of Chlorinated and Recalcitrant Compounds*. Battelle Press, Columbus, OH.
10. Cost and Performance Report, In-Situ Thermal Desorption, at the former Mare Island Naval Shipyard, November 1999, Naval Facilities Engineering Service Center, Port Hueneme, 93043-4370
11. *Final Report For Environmental Technology Partnership (ETP) Demonstration In-Situ Thermal Desorption*. TerraTherm Environmental Services, Inc. and RT Environmental Services, Inc. October 98.
12. TerraTherm, Case Study Saipan. (<http://www.terraetherm.com/cases.htm>)
13. TerraTherm, Case Study Centerville Beach (<http://www.terraetherm.com/cases.htm>)
14. Ralph S. Baker, Ph.D and John C. LaChance, In-Situ Thermal Destruction (ISTD) Performance Relative to Dioxins, submitted for publication in H. Al-Ekabi (Ed.), *Current Practices in Oxidation and Reduction Technologies for Soil and Groundwater*, and presented at the 2<sup>nd</sup> International Conf. On Oxidation and Reduction Technologies for Soil and Groundwater, ORTs-2, Toronto, Canada, Nov. 17-21, 2002
15. Comments on Fact Sheet, TerraTherm, Ralph Baker 11. December 2002
16. TerraTherm, In Situ Thermal Destruction (ISTD) at Pesticide Waste Disposal Pit (<http://www.terraetherm.com/cases.htm>)

# ***In-Situ Thermal Destruction (ISTD) – Annex to Pesticides Treatment Technology Fact Sheet***

**Table 1: Technology overview Alternative Waste technologies – Summary-Technical Details**

<b>Technology Provider</b>	<b>Technology</b>	<b>Scale +</b>	<b>Pest Comp. treated</b>	<b>Related comp treated</b>	<b>Validation project experience **</b>	<b>Applicability Ranking ++</b>	<b>Additional Remarks</b>
TerraTherm	ISTD	P		PCBs		DA	Demonstration test of full-scale ISTD system treating PCBs, Missouri Electric Works (MEW), Cape Girardeau, MO
TerraTherm	ISTD	P		PCBs in soil		DA	Former Mare Island U.S. Naval Shipyard, Vallejo, CA Field Demo
TerraTherm	ISTD (Thermal blankets)	F		PCBs in soil		DA	Tanapag Village Site, Saipan, NMI – ex situ application of ISTD
TerraTherm	ISTD	F		PCBs in soil		DA	PCB-contaminated soils under/adjacent to a former transformer /diesel generator building, former U.S. Naval Facility Centerville Beach, Ferndale, CA.
TerraTherm	ISTD	F	HCH, aldrin dieldrin, chlordane, endrin, isodrin			DA	Rocky Mountain Arsenal (RMA) Commerce City, CO, USA is one of the U.S. Department of Defense's complex CERCLA sites with its so-called Hex Pit curtailed after 12 days (see also Fact Sheet)
TerraTherm	ISTD	F		PAHs, PCP, Dioxins		DA	Southern California Edison Company, Alhambra, California (Former wood treating facility) Still under execution July 2002 – December 2003
TerraTherm	ISTD	F		CVOCs (chlorinated volatile organic compounds, primarily TCE)		DA	Confidential client Ohio, Active manufacturing facility Still under execution May 2002 – December 2003
TerraTherm	ISTD thermal enhancement of exist. multiphase extraction (MPE) system	F		Primarily 1,2-DCA, TCE, and vinyl chloride		DA	Confidential Client, S. California - Former manufacturing facility, Still under execution September 2002 – August 2003
+Key: F - Full-scale applications completed					++Key: Applicability ranking for pesticides		
P - Pilot/Demonstration scale completed; no F-applications					DA – Direct applicable		
B - Bench/Laboratory scale completed; no P or F-applications					FS 1 – Full scale within reasonable period possible 0-2 years		
T - Theoretical applicable, no B, P, F applications					FS 2 – Full scale within considerable period possible 2-5 years		
* Vendor claims performance of demonstration, but no data provided					**Validation on the basis of info provided in Table 2 and 3		

# ***In-Situ Thermal Destruction (ISTD) – Annex to Pesticides Treatment Technology Fact Sheet***

**Table 2: Overview project experience per technology supplier**

Location/project	Contaminants	Amount treated in tons	Results incl DRE, Pre-treat, Post treat, Emissions, energy consumption, costs*	Client References Name, address, contact person phone, Email , fax
Missouri Electric Works (MEW) Superfund Site, Cape Girardeau, Missouri USA	PCBs	52 cubic yards	DRE in excess of 99.9999998% for PCB (Aroclor 1260)	<b>USEPA Point of Contact:</b> Remedial Project Manager Pauletta France-Isetts U.S. EPA Region 7, 726 Minnesota Ave Kansas City, KS 66101 (913) 551-7701
Former Mare Island Naval Shipyard Demonstration Test	PCBs	60 cubic yards	DRE in excess of 99.9999% for PCB (Aroclor 1260)	<b>U.S. Navy Contact:</b> Mr. Ken Spielman EFA West, NAVFAC, Code 182 900 Commodore Drive, San Bruno, CA 94066 Telephone: 650-244-2539, Fax: 650-244-2553 Email: khspielman@efawest.navy.mil
Tanapag Village Site, Saipan, NMI	PCBs in soil	1000 cubic yards	PCBs treated to 10 ppm or less by using thermal blankets	<b>U.S. Army Corps of Engineers Point of Contact:</b> Ms. Helene Takamoto, Honolulu District, Building 252, ATTN: CEPOH-PP-E, Ft. Shafter, HI 96858-5440 Tele.: (808) 438-6931
PCB Spill Area, U.S. Naval Facility, Ferndale, CA	PCBs in soil	1000 cubic yards	DRE for the integrated system was calculated to be 99.999995%	<b>U.S. Navy Contact:</b> Mr. Chris Lonie, Naval Facilities Engineering Service Center, Code ESC414, 1100 23rd Ave., Port Hueneme, CA 93043, (805) 982-5560.
Rocky Mountain Arsenal (RMA) Commerce City, CO, with its so-called Hex Pit	HCH, aldrin, dieldrin, chlordane, endrin isodrin	2550 cubic yards	No data available	<b>USEPA Point of Contact:</b> Kerry Guy, Remedial Project Manager, USEPA Reg. 8, Bldg. 111, Rocky Mountain Arsenal, Commerce City, CO 80022-1748, (303) 312-7288.
Southern California Edison Company, Alhambra, California ( Former wood treating facility)	PAHs, PCP, Dioxins	11,500 m <sup>3</sup> (15,000 cy), still under execution May 2002 – December 2003	Not yet operated	State of California Expedited Remedial Action Program (ERAP) site <b>Southern California Edison Point of Contact:</b> Ms. Jennie King, Project Manager, Southern California Edison, 2244 Walnut Grove Ave., Rosemead, CA 91770, Tele.: (626) 302-4257, Fax: (626) 302-3005, Email: kingjj@sce.com
Confidential Client, Ohio - Active manufacturing facility	CVOCs (chlorinated volatile organic compounds)	8,400 m <sup>3</sup> (10,950 cy) low permeability clay still under execution July 2002 – June 2003	Not yet operated	State of Ohio Voluntary Action Program (VAP) site Confidential Client
Confidential Client, California - Former manufacturing facility	Primarily 1,2-DCA, TCE, and vinyl chloride	Approximately 3,800 m <sup>3</sup> (approximately 5,000 cy) silty-clay soil. Still under execution Sept. 2002 – August 2003	Not yet operated	Regulatory Agency: State of California Department of Toxic Substances Control (DTSC) Confidential Client



## In-Situ Thermal Destruction (ISTD) – Annex to Pesticides Treatment Technology Fact Sheet

**Table3: Overview detailed project information per project – Project name (from Table 2):**

Location project	Pre-treat mg/kg	Post-treat mg/kg	DREs	Emissions 1. Air (HCl, Diox/furans etc) 2. Water, 3. Waste (slags)	Energy Consumption.	Costs(Capital , operating costs)
Missouri Electric Works (MEW) Superfund Site, Cape Girardeau, Missouri USA	PCB average 782 mg/kg (n=92) max 20,000 mg/kg	PCB (mean) <0.033 mg/kg (n=83) PCB concentrations in all 94 soil samples taken during the demonstration were below the 2 mg/kg cleanup goal	DRE for PCBs was 99.999998 %, meeting the goal of 99.9999%	Mean Emission rate Thermal Well: 3.47 x 10 <sup>-10</sup> g TEQ/hr Mean stack gas conc. Thermal Well: 0.00291 ng TEQ/dscm Mean Emission rate Thermal Blanket: 4.51 x 10 <sup>-10</sup> g TEQ/hr Mean stack gas conc. Thermal Blanket: 0.000289 ng TEQ/dscm	No data available	No costs were reported for the demonstration. The vendor used data from the demonstration to estimate that the cost for a full-scale application is between \$120 and \$200 per cubic yard for "most standard sites."
Former Mare Island Naval Shipyard Demonstration test	PCB up to 2,200 mg/kg Aroclor –1254 (mean) 35, Aroclor – 1260 (mean) 270 mg/kg	All post-treatment samples had no-detectable PCB at a quantitation limit of 0.033 mg/kg.	DRE in excess of 99.9999% for PCB (Aroclor 1260)	HCl emissions < 4 lbs/hr CO emissions < 10 ppmV CO mean emissions 2 ppmV THC: 0-8 ppmV THC median: < 0.002 lb/hr as CH4	No data available	Based on a more recent full-scale in-situ project of 500 tons and a bid received for a 500-ton ex-situ treatability study, actual construction and operating costs have proven to be quite high, in the range of \$750 to over \$1000 per ton. Costs for larger volumes are much less.
Tanapag Village Site, Saipan, NMI	PCB were indicated with mean 200 ppm, but in fact averaged 500 ppm, (Aroclors 1254 and 1260) and individual batches of 10 000 ppm.	PCBs treated to 10 ppm or less.	No data available	No data available	No data available	No data available
PCB Spill Area, Naval Facility, Ferndale, CA	PCB (Aroclor 1254) ranged from 0.15 ppm to 860 ppm; PCDD/Fs ranged up to 3.2 ppb 2,3,7,8-TCDD-TEQ.	Remedial objectives: Average PCB conc. of 1 ppm or lower; Dioxins and Furans: Total 2,3,7,8 –TCDD TEQ <1.0 ppb achieved for all samples	DRE for the integrated system was calculated to be 99.999995 %	Mean emission rate: 1.84 x 10 <sup>-9</sup> g TEQ/hr, or a mean stack gas concentration of 0.00547 ng TEQ/dscm.	No data available	The total turnkey cost for design, permitting, operation, demobilization, and reporting was \$480,000 or a approximately \$630/m <sup>3</sup> (\$480/cy)

## ***In-Situ Thermal Destruction (ISTD) – Annex to Pesticides Treatment Technology Fact Sheet***

<p>Rocky Mountain Arsenal (RMA) Commerce City, ( Hex Pit)</p>	<p>Hex averaged 7600 mg/kg; Dieldrin averaged 3350 mg/kg; Although pretreatment concentrations of Polychlorinated Dibenzodioxin/Furan (PCDD/F) congeners were non-calculable due to matrix interferences, the average PCDD/F concentration in soil expressed in units of 2,3,7,8-TCDD TEQ was estimated to be at least 120 ng/g.</p>	<p>Primary remedial objectives: Average in-situ DRE of &gt;90% for Hex, Chlordane, and Dieldrin; Secondary remedial objectives: Human Health Evaluation (HHE) Criteria of &lt;1100 mg/kg Hex; &lt;71 mg/kg Aldrin; &lt; 55 mg/kg Chlordane; &lt; 41 mg/kg Dieldrin; &lt;230 mg/kg Endrin; and &lt;52 mg/kg Isodrin. No data available from post-treatment samples</p>	<p>No data available</p>	<p>Air emission objectives: CO &lt;100 ppm<sub>v</sub>, THC &lt;20 ppm<sub>v</sub>, dioxins and furans &lt;0.17 ng/dscm 2,3,7,8-TCDD TEQ (&lt;13 ng/dscm total tetra-octa dioxin and furan congeners), HCl &lt;330 g/hr, Cl<sub>2</sub> &lt;19 g/hr, and particulates &lt;23 mg/dscm. No data during operation available</p>	<p>No data available</p>	<p>No data available</p>
<p>Southern California Edison Company, Alhambra, California (Former wood treating facility)</p>	<p>PAHs ranged up to 406 mg/kg benzo(a)pyrene toxic equivalents; pentachlorophenol ranged up to 21 mg/kg; Dioxins and Furans reported to be &lt;1 µg/kg 2,3,7,8-TCDD TEQ.</p>	<p>Remedial objectives: Average PAH conc. of &lt;0.065 mg/kg benzo(a)pyrene toxic equivalents; Dioxins and Furans: Total 2,3,7,8-TCDD TEQ &lt; 1.0 ppb. Not yet operated</p>	<p>Not yet operated</p>	<p>Air emission objectives: THC &lt;100 ppm<sub>v</sub>, dioxins and furans &lt;0.2 ng/dscm 2,3,7,8-TCDD TEQ, PM &lt;0.002 gr/dscf, and VOCs (expressed as hexane) &lt;100 ppm<sub>v</sub> (&lt;18,612 ppm<sub>v</sub> at inlet to thermal oxidizer). Not yet operated</p>	<p>Not yet operated</p>	<p>The total turnkey cost for design, permitting, operation, demobilization, and reporting is projected to be approximately \$5,300,000 or approximately \$460/m<sup>3</sup> (\$350/cy)</p>
<p>Confident Client, Ohio, USA Active manufact. facility</p>	<p>TCE concentrations within the target treatment zone range from non-detectable up to 4,130 ppm</p>	<p>Remedial objectives: 1.056 mg/kg TCE, 28.60 mg/kg 1,1,1-TCA, and 5.94 mg/kg PCE. Not yet operated</p>	<p>Not yet operated</p>	<p>Air emission objectives: Post-treatment emissions from the system will be below both the stipulated limit of 10 pounds of contaminant per day and the reported typical odor recognition threshold of 10 ppm by volume for hydrochloric acid. Not yet operated</p>	<p>Not yet operated</p>	<p>No data available</p>
<p>Confidential Client, California, USA - Former manufact. facility</p>	<p>1,2-DCA ranges from 13 mg/kg up to 11,000 mg/kg, TCE from 0.034 mg/kg to 29 mg/kg, and vinyl chloride from non-detectable to 18 mg/kg</p>	<p>Remedial objectives: to reduce the concentrations of each of the chlorinated VOCs in the target treatment zone to &lt;1 mg/kg. Not yet operated</p>	<p>Not yet operated</p>	<p>Not yet operated</p>	<p>Not yet operated</p>	<p>No data available</p>